

# Advanced Computer Networks

## External Routing - BGP protocol

Prof. Andrzej Duda  
duda@imag.fr


<http://duda.imag.fr>

1

## Contents

- Principles of Inter-Domain Routing
  - Autonomous systems
  - Path vector routing
  - Policy Routing
  - Route Aggregation
- How BGP works
  - Attributes of routes, route selection
- Examples
- Illustrations and statistics

2

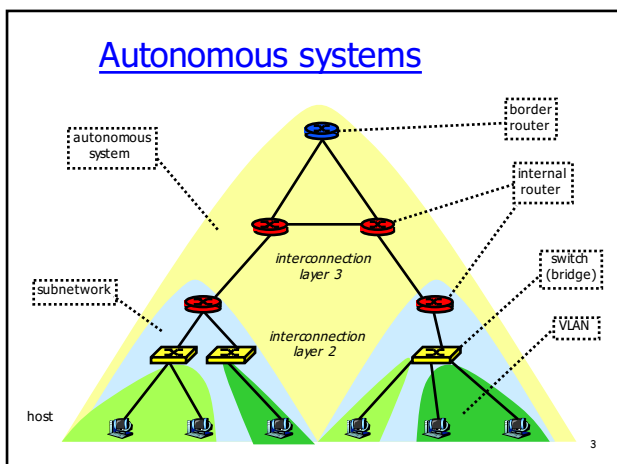

## Autonomous Systems


- Routing domain under one single administration
  - one or more border routers
  - all subnetworks should be connected - run an interior gateway protocol (IGP like OSPF) to be able to forward packets within the AS
  - should learn about all other prefixes - use an exterior gateway protocol (EGP like BGP) to route packets to other AS
  - autonomy of management

4

## AS numbers

- AS number
  - 16 bits, extended to 32 bits: x.y
  - 0.y - old 16 bits numbers, 1.y - reserved
  - public: 1 - 64511
  - private: 64512 - 65535
  - ASs that do not need a number are typically those with a default route to the rest of the world
- Examples
  - AS1942 - CIGG-GRENOBLE, AS1717, AS2200 - Renater
  - AS559 - SWITCH Teleinformatics Services (EPFL)
  - AS5511 - OPENTRANSIT

5

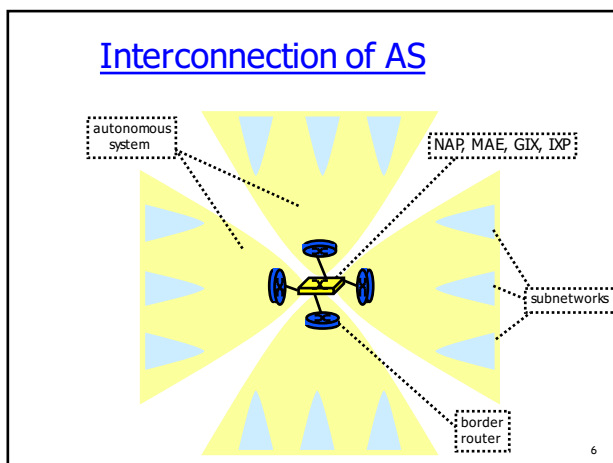


### Interconnection of AS

- Border routers
  - interconnect AS
  - advertise routes to internal subnetworks
    - AS accepts the traffic
    - there is an internal route to the destination - AS is able to forward packets to the destination, otherwise - black hole
  - learn routes to external subnetworks
- Interconnection point
  - NAP (Network Access Point), MAE (Metropolitan Area Ethernet), CIX (Commercial Internet eXchange), GIX (Global Internet eXchange), IXP, SFINX, LINX
  - exchange of traffic - peering contract between ASs
- High-speed local area network connecting border routers of ASs

7

### Example interconnection


- AS can be transit (B and D), stub (A) or multihomed (C). Only non stub AS needs a number.

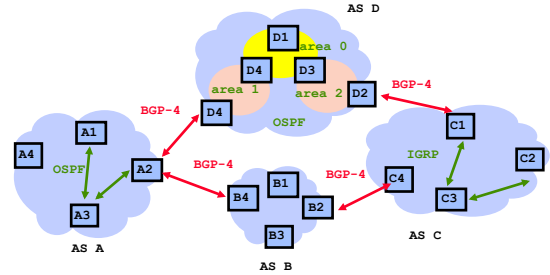

8


### What does BGP do?

- BGP is a routing protocol between AS. It is used to establish routes from one router in one AS to any network prefix in the world
- There are two levels in BGP:
  - Inter-domain: one AS is a virtual node in the higher layer
  - Intra-domain: distribution of routes inside one AS
- The method of routing is
  - Path vector
  - With policy
- A route advertisement from B to A for a destination prefix is an agreement by B that it will forward packets sent via A destined for any destination in the prefix.



9

### Path Vector routing

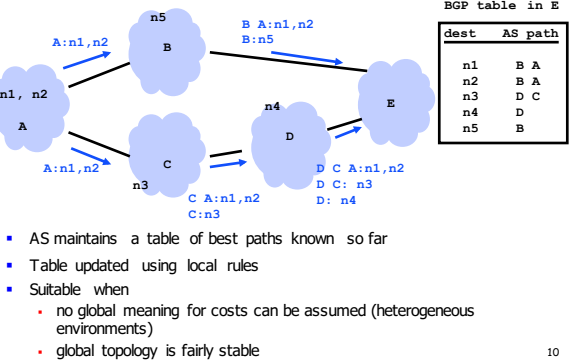


- AS maintains a table of best paths known so far
- Table updated using local rules
- Suitable when
  - no global meaning for costs can be assumed (heterogeneous environments)
  - global topology is fairly stable

10

### Border Routers, E-BGP and I-BGP

- E-BGP: BGP runs on *border routers* = "BGP speakers" belonging to one AS only
  - two border routers per boundary (OSPF - one per area boundary)
- I-BGP: BGP speakers talk to each other inside the AS using "Internal-BGP"
  - full mesh called the "BGP mesh"
  - I-BGP is the same as E-BGP except for one rule: routes learned from a neighbour in the mesh are not repeated inside the mesh

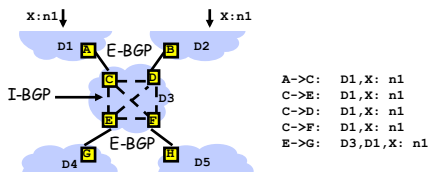


11

### Policy Routing

- Mainly 3 types of relations depending on money flows
  - customer:** EPFL is customer of Switch. EPFL pays Switch
  - provider:** Switch is provider for EPFL; Switch is paid by EPFL
  - peer:** EPFL and CERN are peers: costs of interconnection is shared
- Type of relation is negotiated in bilateral agreements there is no architecture rule, just business

12


### Customer-provider

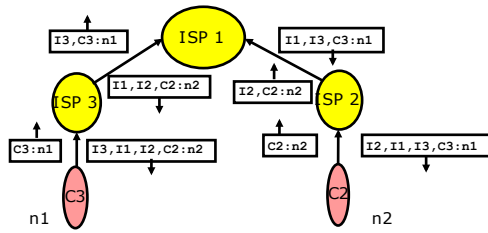

peers ↑ provider  
customer

13


### Peers

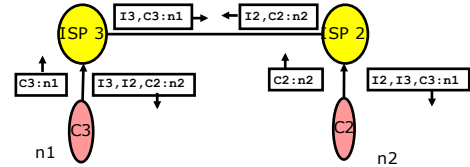

peers ↑ provider  
customer

14


### Peers

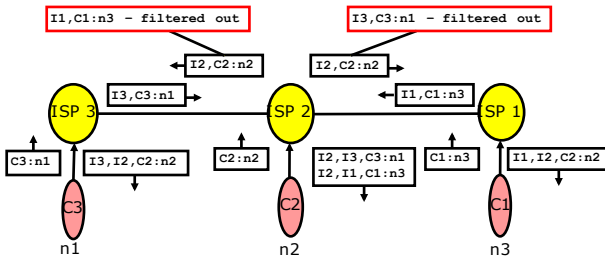

peers ↑ provider  
customer

15

### Goal of Policy Routing




- Example:
  - ISP 3 - ISP 2 is transatlantic link, cost shared between ISP2 and ISP 3
  - ISP 3 - ISP 1 is a local, inexpensive link
  - Ci is customer of ISPi, ISPs are peers
- It is advantageous for ISP3 to send traffic to n2 via ISP1
- ISP1 does not agree to carry traffic from C3 to C2
  - ISP1 offers a "transit service" to C1 and a "non-transit" service to ISP 2 and ISP3
- The goal of "policy routing" is to support this and other similar requirements

peers ↑ provider  
customer

16

### How does Policy Routing Work ?




- Implemented by rules followed by BGP speakers
  - refuse to import or announce some routes
  - modify the attributes that control which route is preferred (see later)
- Example
  - ISP 1 announces to ISP 3 all networks of C1
  - ISP 1 announces to C1 all routes it has learnt from ISP3 and ISP2
  - ISP2 announces "ISP2 n2" to ISP3 and ISP1; assume that ISP1 announces "ISP1 ISP2 n2" to ISP3.
  - ISP 3 has two routes to n2: "ISP2 n2" and "ISP1 ISP2 n2"; assume that ISP3 prefers "ISP1 ISP2 n2"
  - packets from n3 to n2 are routed via ISP1 - undesired
  - solution: ISP 1 announces to ISP3 only routes to ISP1's customers (not "ISP1 ISP2 n2")

peers ↑ provider  
customer

17

### Typical Policy Routing Rules



- Provider (ISP1) to customer (C1)
  - announce all routes learnt from other ISPs
  - import only routes that belong to C1  
example: import from IMAG only one route 129.88/16
- Customer (C1) to Provider (ISP1)
  - announce all routes that belong to C1
  - import all routes
- Peers (ISP1 to ISP3)
  - announce only routes to all customers of ISP1
  - import only routes to ISP3's customer
  - these routes are defined as part of peering agreement
- The rules are defined by every AS and implemented in all BGP speakers in one AS


peers ↑ provider  
customer

18

### Prefix Aggregation


- AS that does not have a default route (i.e. all transit ISPs) must know all routes in the world (> 200 000 prefixes)
  - in IP routing tables unless default routes are used
  - in BGP announcements
- Aggregation is a way to reduce the number of routes

### Aggregation Example 1




- Assume AS3 aggregates the routes received from AS1 and AS2
  - AS1: 193.212.0.0/24 AS\_PATH: 1
  - AS2: 193.212.1.0/24 AS\_PATH: 2
  - AS3: 193.212.0.0/23 AS\_PATH: 3 {1 2}
  - AS4: 193.212.0.0/23 AS\_PATH: 4 3 {1 2}

### Aggregation Example 2




- AS4 receives
  - 197.8.2.0/23 AS\_PATH: 3 {1 2}
  - 197.8.3.0/24 AS\_PATH: 2
- What happens to packets from n4 to n2?
  - if AS4 puts two entries: 197.8.2.0/23, 197.8.3.0/24
  - if AS4 puts one entry: 197.8.2.0/23

### Aggregation Example 3

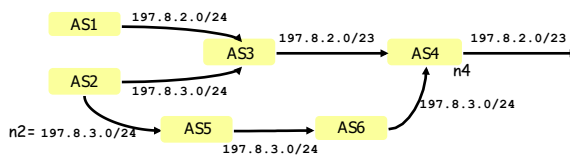

- AS4 receives
  - 197.8.2.0/23 AS\_PATH: 3 {1 2}
  - 197.8.3.0/24 AS\_PATH: 6 5 2
- What happens to packets from n4 to n2?
  - if both routes are used: 197.8.2.0/23, 197.8.3.0/24
  - if the shortest AS path is used: 197.8.2.0/23

### Example Without Aggregation



- AS3 has 197.8.0.0/23
- If AS3 does not aggregate, what are the routes announced by AS4?
  - 197.8.0.0/23 AS\_PATH: 4 3
  - 197.8.2.0/24 AS\_PATH: 4 3 1
  - 197.8.3.0/24 AS\_PATH: 4 2
- There is no benefit since all routes go via AS4 anyhow. AS4 should aggregate to 197.8.0.0/22.

### Conclusion


- Aggregation should be performed whenever possible
  - when all aggregated prefixes have the same path (example 1)
  - when all aggregated prefixes have the same path before the aggregation point (examples 2 to 4)
- An AS can decide to
  - Aggregate several routes when exporting them
  - But still maintain different routing entries inside its domain (example 2)

## BGP (Border Gateway Protocol)

- BGP-4, RFC 1771
- AS border router - BGP speaker
  - peer-to-peer relation with another AS border router
  - connected communication
    - on top of a TCP connection, port 179 (vs. datagram (RIP, OSPF))
  - external connections (E-BGP)
    - with border routers of different AS
  - internal connections (I-BGP)
    - with border routers of the same AS
  - BGP only transmits modifications

25


## BGP principles



- Establish BGP session
- Update
  - list of destinations reachable via each router
  - path attributes such as degree of preference for a particular route

26

## BGP principles



- n1 no longer reachable
- Incremental update
  - withdraw n1


27

## Operation of a BGP speaker

- BGP speaker
  - stores received routes in **Adj-RIB-in**
    - one per BGP peer (internal or external)
  - applies **decision process** and stores results in **Loc-RIB** (global to BGP speaker)
    - decide which routes to accept, how to rank them (set LOCAL-PREF), which routes to export and with which attributes
  - dispatches results per outgoing interface into **Adj-RIB-out** (one per BGP peer), after aggregation and information reduction
  - maintains adjacency to peers: open, keep-alive
  - sends updates when Adj-RIB-out changes
  - **write forwarding entries** in its routing table; redistributes routes learnt from E-BGP from Loc-RIB into IGP and vice-versa, unless other mechanisms are used (see examples)


28

## Inside BGP

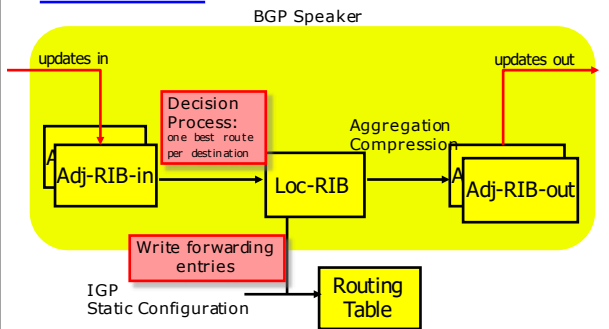

29

## E-BGP and I-BGP

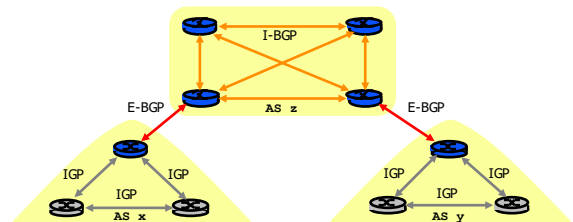

- Border routers of different AS exchange route information using External BGP (E-BGP)
  - peer border routers should be on the same subnetwork
- Border routers of AS exchange route information using Internal BGP (I-BGP)


30

## Routes have attributes

- **Route** - unit of information; contains:
  - destination (subnetwork prefix)
  - path to the destination (AS-PATH)
  - attributes
    - Well-known Mandatory
      - ORIGIN (route learnt from IGP, BGP or static)
      - AS-PATH
      - NEXT-HOP (see later)
    - Well-known Discretionary
      - LOCAL-PREF (see later)
      - ATOMIC-AGGREGATE (= route cannot be dis-aggregated)
    - Optional Transitive
      - MULTI-EXIT-DISC (MED) (see later)
      - AGGREGATOR (who aggregated this route)
    - Optional Nontransitive
      - WEIGHT (see later)

31

## NEXT\_HOP

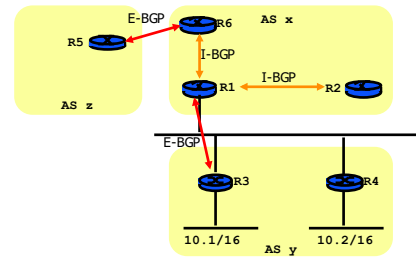

- R3 advertises 10.2/16 to R1, NEXT\_HOP = R4 IP address
- R6 advertises 10.1/16 to R5, NEXT\_HOP = R6 IP address


32

## Preference attributes

- When multiple routes exist, choose one route to put into the BGP routing table
- Preference information
  - passed to other ASs - MED
  - local to an AS - LOCAL\_PREF
  - local to a BGP router - WEIGHT

33


## MULTI-EXIT-DISC (MED)

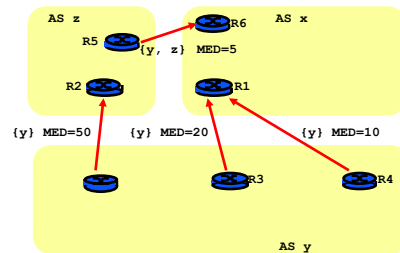

- Preference for a prefix list when there are several exit routers from an AS
  - AS y advertises its prefixes with MED 10, 20, 50
  - AS x will accept the prefix with the smallest MED

34

## MULTI-EXIT-DISC (MED)

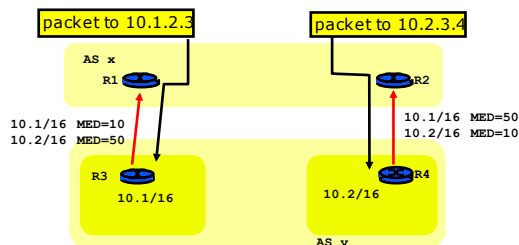

- One AS connected to another over several links
  - ex: multinational company connected to worldwide ISP
  - AS y advertises its prefixes with different MEDs (low = preferred)
  - If AS x accepts to use MEDs put by AS y: traffic goes on preferred link

35

## MED Example

- Q1: by which mechanisms will R1 and R2 make sure that packets to AS y use the preferred links?
  - R1 and R2 exchange their routes to AS y via I-BGP
  - R1 has 2 routes to 10.1/16, one of them learnt over E-BGP; prefers route via R1; injects it into IGP
  - R1 has 2 routes to 10.2/16, one of them learnt over E-BGP; prefers route via R2; does not inject a route to 10.2/16 into IGP
- Q2: router R3 crashes; can 10.1/16 still be reached? explain the sequence of actions.
  - R1 clears routes to AS y learnt from R3 (keep-alive mechanism)
  - R2 is informed of the route suppression by I-BGP
  - R2 has now only 1 route to 10.1/16 and 1 route to 10.2/16; keeps both routes in its local RIB and injects them into IGP since both were learnt via E-BGP
  - traffic to 10.1/16 now goes to R2

36

### MED Question

- Q1: Assume now AS x and AS y are peers (ex: both are ISPs). Explain why AS x is not interested in taking MED into account.  
A: AS x is interested in sending traffic to AS y to the nearest exit, avoiding transit inside AS x as much as possible. Thus AS x will choose the nearest route to AS y and will ignore MEDs
- Q2: By which mechanisms can AS x pick the nearest route to AS y?  
A: it depends on the IGP. With OSPF: all routes to AS y are injected into OSPF by means of type 5 LSAs. These LSAs say: send to router R3 or R4. Every OSPF router inside AS x knows the cost (determined by OSPF weights) of the path from self to R3 and R4. Packets to 10.1/16 and 10.2/16 are routed to the nearest among R3 and R4 (nearest = lowest OSPF cost).


### LOCAL-PREF



- Used inside an AS to select the best *AS path*
  - Assigned by border router when receiving route over E-BGP
    - Propagated without change over I-BGP
  - Example
    - R6 associates pref=100, R2 pref=10
    - R1 chooses the largest preference
- `bgp default local-preference pref-value`


### LOCAL-PREF Example

- Q1: The link AS2-AS4 is expensive. How should AS 4 set local-prefs on routes received from AS 3 and AS 2 in order to route traffic preferably through AS 3?
- Q2: Explain the sequence of events for R1, R2 and R3.

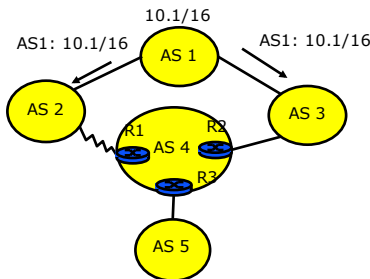

### LOCAL-PREF Example

- Q1: The link AS2-AS4 is expensive. How should AS 4 set local-prefs on routes received from AS 3 and AS 2 in order to route traffic preferably through AS 3?
- A: for example: set LOCAL-PREF to 100 to all routes received from AS 3 and to 50 to all routes received from AS 2

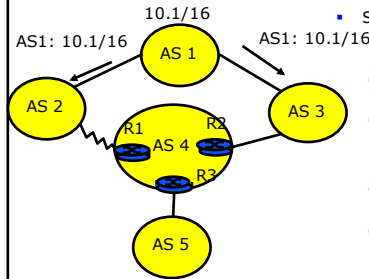

- Sequence of events
  - R1 receives the route AS2 AS1 10.1/16 over E-BGP; sets LOCAL-PREF to 50
  - R2 receives the route AS3 AS1 10.1/16 over E-BGP; sets LOCAL-PREF to 100
  - R3 receives AS2 AS1 10.1/16, LOCAL-PREF=50 from R1 over I-BGP and AS3 AS1 10.1/16, LOCAL-PREF=100 from R2 over I-BGP
  - R3 selects AS3 AS1 10.1/16, LOCAL-PREF=100 and installs it into local-RIB
  - R3 announces only AS3 AS1 10.1/16 to AS 5

### LOCAL-PREF Question

- Q: Compare MED to LOCAL-PREF  
A:
  - MED is used between ASs (i.e. over E-BGP); LOCAL-PREF is used inside one AS (over I-BGP)
  - MED is used to tell one provider AS which *entry link* to prefer; LOCAL-PREF is used to tell the rest of the world which *AS path* we want to use, by not announcing the other ones.

### WEIGHT

- Associate a weight with a neighbor
- For a local choice at a BGP router
  - `neighbor IP-address weight weight-value`
- The route passing via the neighbor of the largest weight will be chosen
- Never advertised

### Choice of the best route

- Done by **decision process**; route installed in Loc-RIB
- At most one best route to exactly the same prefix is chosen
  - Only one route to 2.2/16 can be chosen
  - But there can be different routes to 2.2.2/24 and 2.2/16
- Route validation: check if NEXT\_HOP is accessible
- Decreasing priority (configurable, skip some steps)
  1. max WEIGHT
  2. max LOCAL\_PREF
  3. shortest AS\_PATH
  4. ORIGIN attribute IGP > EGP > INCOMPLETE
  5. min MULTI\_EXIT\_DISC
  6. shortest IGP distance to NEXT\_HOP
  7. source of the route: E-BGP > I-BGP
  8. route advertised by router having the smallest IP address


43

### Route dampening

- Route modification propagates everywhere
  - successive UPDATE and WITHDRAW of a route
- Sometimes routes are *flapping*
  - successive UPDATE and WITHDRAW
  - caused for example by BGP speaker that often crashes and reboots
- Solution:
  - decision process eliminates flapping routes
- How
  - withdrawn routes are kept in Adj-RIB-in
  - if comes up again soon (ie : flap), route receives a penalty
  - penalty fades out exponentially (halved at each half-life-time)
  - used to suppress or restore routes
- Thresholds: suppress-limit, reuse-limit

44


### Route dampening

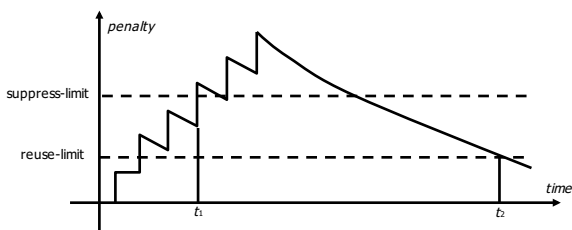

- Route suppressed at  $t_1$ , restored at  $t_2$

45


### Ex1: Stub AS



- BGP not needed between Client and Operator
- No AS number for client
- R2 learns all prefixes in Client by static configuration or IGP on link R1—R2
- Example: IMAG and CIGG-GRENOBLE
- what if R1 fails ?

46


### Ex2: Dual Homing to Single Provider

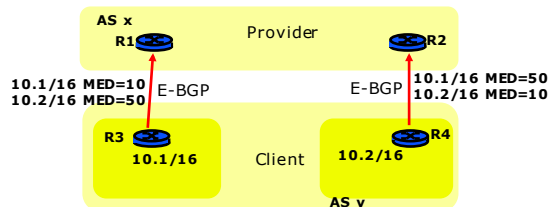

- With numbered Client AS
  - Use MED to share traffic from ISP to Client on two links
  - Use Client IGP configuration to share traffic from Client on two links
  - Q1: is it possible to avoid distributing BGP routes into Client IGP ?
  - Q2: is it possible to avoid assigning an AS number to Client ?
  - Q3: is it possible to avoid BGP between Client and Provider ?

47


### Ex2: Dual Homing to Single Provider

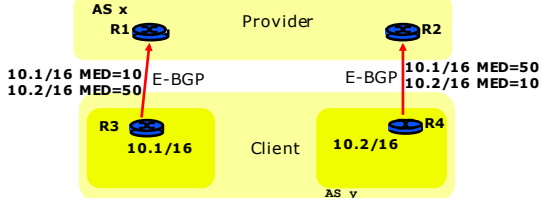

- Q1: is it possible to avoid distributing BGP routes into Client IGP ?
- A: yes, for example: configure R3 and R4 as default routers in Client AS; traffic from Client AS is forwarded to nearest of R3 and R4. If R3 or R4 fails, to the remaining one
- Q2: is it possible to avoid assigning an AS number to Client ?
- A: Yes, it is sufficient to assign to Client a private AS number: Provider translates this number to its own.
- Q3: is it possible to avoid BGP between Client and Provider ?
- A: Yes, by running a protocol like RIP between Client and Provider and redistributing Client routes into Provider IGP. Thus Provider pretends to the rest of the world that the prefixes of Client are its own.




### Ex3: Hot Potato Routing

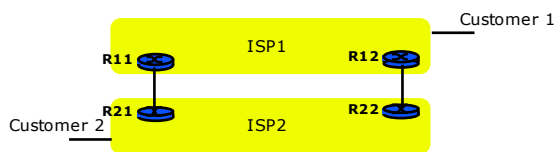

- Packets from Customer 2 to Customer 1
  - Both R21 and R22 have a route to Customer 1
  - Shortest path routing favors R21
  - Q1: by which mechanism is that done?
- Q2: what is the path followed in the reverse direction?

49

### Ex3: Hot Potato Routing

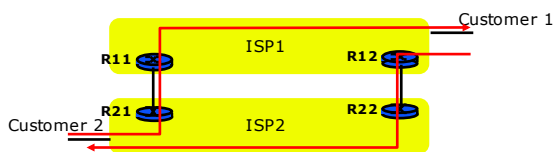


- Packets from Customer 2 to Customer 1
  - Both R21 and R22 have a route to Customer 1
  - Shortest path routing favors R21
  - Q1: by which mechanism is that done?
  - A: « Choice of the best route » (criterion 7), assuming all routers in ISP2 run BGP
- Q2: what is the path followed in the reverse direction?
  - A: see picture. Note the asymmetric routing

50


### Some statistics

- Number of routes
  - 1988-1994: exponential increase
  - 1994-1995: CIDR
  - 1995-1998: linear increase (10000/year)
  - 1999-2000: return to exponential increase (42% per year)
  - since 2001: return to linear increase, ~120,000
- Number of ASs
  - 51% per year for 4 last years
  - 14000 AS effectively used
- Number of IP addresses
  - 162,128,493 (Jul 2002)
  - 7% per year

51

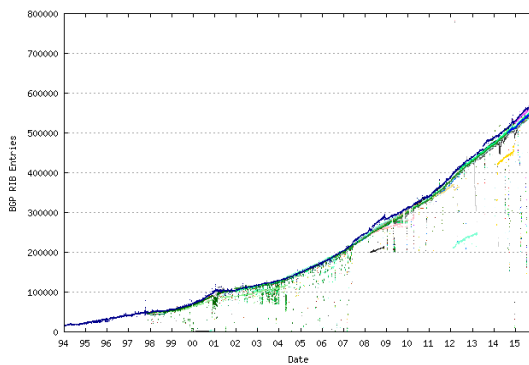


52

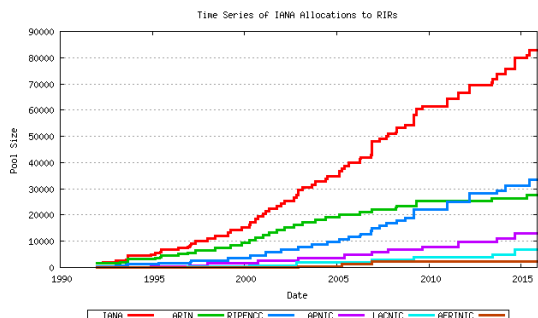

53

### Number of hosts

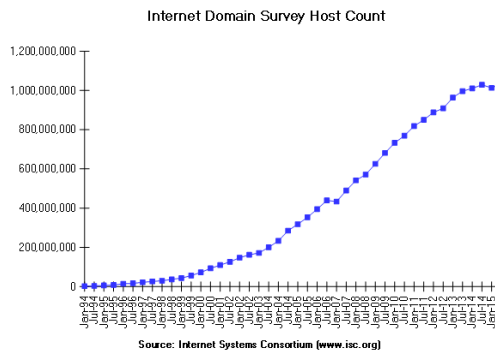

Source: Internet Systems Consortium ([www.isc.org](http://www.isc.org))

54

## BGP statistics

BGP routing table entries examined: 117013  
 Total ASes present in the Internet Routing Table: 14042  
 Origin-only ASes present in the Internet Routing Table: 12159  
 Transit ASes present in the Internet Routing Table: 1883  
 Transit-only ASes present in the Internet Routing Table: 63  
 Average AS path length visible in the Internet Routing Table: 5.3  
 Max AS path length visible: 23  
 Number of addresses announced to Internet: 1182831464  
 Equivalent to 70 /8s, 128 /16s and 147 /24s  
 Percentage of available address space announced: 31.9  
 Percentage of allocated address space announced: 58.5

55

## Prefix length distribution

/1:0	/2:0	/3:0	/4:0	/5:0	/6:0
/7:0	/8:17	/9:5	/10:8	/11:12	/12:46
/13:90	/14:239	/15:430	/16:7308	/17:1529	/18:2726
/19:7895	/20:7524	/21:5361	/22:8216	/23:9925	/24:64838
/25:185	/26:221	/27:126	/28:105	/29:85	/30:93
/31:0	/32:29				

56

## AS 559 - SWITCH

AS559 SWITCH-AS SWITCH Teleinformatics Services

Adjacency: 3 Upstream: 2 Downstream: 1

Upstream Adjacent AS list

AS1299 TCN-AS Telia Corporate Network

AS3549 GBLX Global Crossing


Downstream Adjacent AS list

AS4128 RG-SPARE RGnet, Inc.

Prefix	(AS Path)
128.178.0.0/15	1 3549 559
129.129.0.0/16	1 3549 559
129.132.0.0/16	1 3549 559

57

## Switch

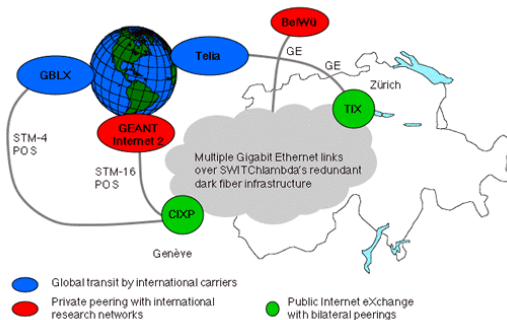

58

## AS 1942 - CIGG-GRENOBLE

AS1942 AS1942 FR-CIGG-GRENOBLE

Adjacency: 1 Upstream: 1 Downstream: 0

Upstream Adjacent AS list

AS2200 AS2200 RENATER 2

Prefix	(AS Path)
129.88.0.0/16	1239 5511 2200 1942
130.190.0.0/16	1239 5511 2200 1942
147.171.0.0/16	1239 5511 2200 1942
147.173.0.0/16	1239 5511 2200 1942

2200 - Renater-2, 5511 - OpenTransit (FT), 1239 - Sprint

59

## Looking glass at genbb1.opentransit.net

```
sh ip bgp 129.88.38.241
BGP routing table entry for 129.88.0.0/16, version 34110212
2200 1942
 193.51.185.30 (metric 16) from 193.251.128.5 (193.251.128.1)
   Origin IGP, localpref 100, valid, internal
   Community: 2200:1001 2200:2200 5511:211 5511:500 5511:503 5511:999
   Originator: 193.251.128.1, Cluster list: 0.0.0.10
2200 1942
 193.51.185.30 (metric 16) from 193.251.128.3 (193.251.128.1)
   Origin IGP, localpref 100, valid, internal
   Community: 2200:1001 2200:2200 5511:211 5511:500 5511:503 5511:999
   Originator: 193.251.128.1, Cluster list: 0.0.0.10
2200 1942
 193.51.185.30 (metric 16) from 193.251.128.1 (193.251.128.1)
   Origin IGP, localpref 100, valid, internal, best
   Community: 2200:1001 2200:2200 5511:211 5511:500 5511:503 5511:999
```

60

## [From genbb1.opentransit.net](#)

Tracing the route to horus.imag.fr (129.88.38.1)

```
1 P8-0-0.GENAR1.Geneva.opentransit.net (193.251.242.130) 0 msec 0 msec 0 msec
2 P6-0-0.GENAR2.Geneva.opentransit.net (193.251.150.30) 0 msec 4 msec 0 msec
3 P4-3.BAGBB1.Bagnolet.opentransit.net (193.251.154.97) 8 msec 8 msec 8 msec
4 193.51.185.30 [AS 2200] 16 msec 16 msec 16 msec
5 grenoble-pos1-0.cssi.renater.fr (193.51.179.238) [AS 2200] 16 msec 20 msec 16 ms
6 tigre-grenoble.cssi.renater.fr (195.220.98.58) [AS 2200] 20 msec 20 msec 20 msec
7 r-campus.grenet.fr (193.54.184.45) [AS 1942] 20 msec 16 msec 16 msec
8 r-imag.grenet.fr (193.54.185.123) [AS 1942] 20 msec 20 msec 20 msec
9 horus.imag.fr (129.88.38.1) [AS 1942] 16 msec 20 msec 20 msec
```

61

## [Looking glass at genbb1.opentransit.net](#)

```
sh ip bgp 128.178.50.92
BGP routing table entry for 128.178.0.0/15, version 30024182
1299 559
193.251.252.22 (metric 13) from 193.251.128.5 (193.251.128.4)
  Origin IGP, metric 100, localpref 85, valid, internal
  Community: 5511:666 5511:710
  Originator: 193.251.128.4, Cluster list: 0.0.0.10
1299 559
193.251.252.22 (metric 13) from 193.251.128.3 (193.251.128.4)
  Origin IGP, metric 100, localpref 85, valid, internal
  Community: 5511:666 5511:710
  Originator: 193.251.128.4, Cluster list: 0.0.0.10
1299 559
193.251.252.22 (metric 13) from 193.251.128.1 (193.251.128.4)
  Origin IGP, metric 100, localpref 85, valid, internal, best
  Community: 5511:666 5511:710
  Originator: 193.251.128.4, Cluster list: 0.0.0.10
```

62

## [From genbb1.opentransit.net](#)

Tracing the route to empc19.epfl.ch (128.178.50.92)

```
1 P5-1.PASBB1.Pastourelle.opentransit.net (193.251.150.25) 8 msec
  P4-1.PASBB1.Pastourelle.opentransit.net (193.251.242.134) 8 msec
  P5-1.PASBB1.Pastourelle.opentransit.net (193.251.150.25) 8 msec
2 P8-0.PASBB2.Pastourelle.opentransit.net (193.251.240.102) 8 msec 8 msec 8 msec
3 Telia.GW.opentransit.net (193.251.252.22) 8 msec 12 msec 8 msec
4 prs-bb1-pos0-3-0.telia.net (213.248.70.1) [AS 1299] 8 msec 8 msec 8 msec
5 ffm-bb1-pos2-1-0.telia.net (213.248.64.190) [AS 1299] 16 msec 16 msec 16 msec
6 zch-b1-pos6-1.telia.net (213.248.65.42) [AS 1299] 48 msec 32 msec 48 msec
7 dante-01287-zch-b1.c.telia.net (213.248.79.190) [AS 1299] 44 msec 36 msec 44 msec
8 swIEZ2-G3-2.switch.ch (130.59.36.249) [AS 559] 36 msec 44 msec 36 msec
9 swiLS2-G2-3.switch.ch (130.59.36.33) [AS 559] 36 msec 36 msec 36 msec
10 * * *
```

63

## [Conclusion](#)

- BGP
  - essential to the current structure of the Internet
  - influence the choice of the IGP routing - OSPF recommended
  - AS numbers exhaustion - extended to 32 bits
  - complex - policy management, filtering
  - bad configuration - route suppression

64